

LED Intelligent Dimming Driver

- Can work with leading edge and trailing edge TRIAC dimmers
- · PWM digital dimming, no alter LED color temperature.
- Dimming range: 0~100%
- Multiple current, wide voltage, compatible with a variety of LED lights.
- Short circuit / Over-temperature protection.
- · Full protective plastic housing.
- Compliant with Safety Extra Low Voltage standard.
- Suitable for indoor environments.

0.54-25W 180-700mA 3-54V



SELV































3V-54V Wide Voltage

Main Characteristics

Input Voltage Range:

Frequency:

50/60Hz

AC Current (typ.): 230VAC/≤0.2A

Withstand Voltage: I/P-O/P: 3750VAC; Leakage Current≤5mA

200-240VAC ±10%

Leakage Current: <0.5mA/240V AC

Rated Current: 180/250/350/400/500/550/600/700mA

Operating Voltage Range: 3-54V DC Current Accuracy: $\pm 3\%$

Output Power Range: 0.54W~25W

Efficiency: ≥83%

No Load Output Voltage (max.): $\leq 50 \text{VDC}$

Ripple & Noise (max.): ≤500 mV

Working Temp.: -20 ~ +50℃(Refer to "Derating Curve")

Working Humidity: $20 \sim 95\%$ RH, non-condensing Storage Temp., Humidity: $-40 \sim +80\%$, $10 \sim 95\%$ RH

Temp. Coefficient: ±0.03%/°C(0-50℃)

Vibration: 10~500Hz, 2G 12min./1cycle, period

for 72min. each along X, Y, Z axes

Protection

Short Circuit/Over Temperature: Auto recovery

Others

 Dimension:
 175×44×30mm(L×W×H)

 Packing:
 178×48×33mm(L×W×H)

Weight(N.W.): 120g±10g


Safety & EMC

Withstand Voltage: I/P-O/P: 3750VAC;

Isolation Resistance: I/P-0/P: 100MΩ/500VDC/25°C/70%RH

 $Safety \ specification: \ IEC/EN61347-1 \ , \ IEC/EN61347-2-13 \ , \ EN55015, EN61000-3-2 \ Class \ C, \ EN61000-4-2, 3, 4, 5, 6, 8, 11.$


Dimensions

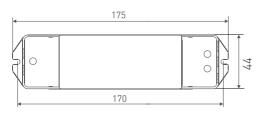




Connections



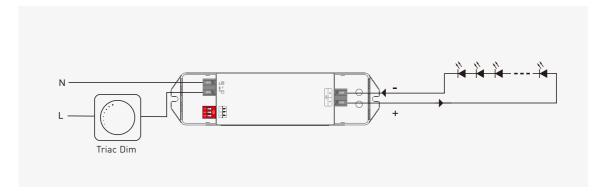

LED Current Selection

The current can be easily configured by choosing the correct combination of the DIP switches (see the table below).

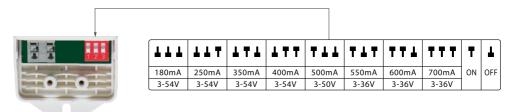

* E.g. LED 3.2V/pcs:

3-54V can power 1-16pcs LEDs in series, 3-36V can power 1-11pcs LEDs in series, the maximum quantity of LEDs in series will be subject to the actual voltage of LED.

2 Update Time: 2015.06.04